

LIGHT TACTICAL TRAILER



MAXIMIZED STORAGE CAPACITY

EDEY FX's innovative support trailer maximizes storage and flexibility for lightweight tactical teams. The Light Tactical Trailer (LTT) features a sizable internal area for heavier cargo, an upper deck with removable panels, removable side walls, two side compartments and a folding tail gate. The lower compartment and upper deck utilize aviation track for cargo tie down.



12" OF SUSPENSION TRAVEL

The light tactical trailer features independent trailing arms supported by coilover shocks with adjustable rebound dampening and spring preloaders. An unsurpassed 30.5cm (12") of wheel travel and 33cm / 13" of ground clearance at GVW allow the LTT to keep pace with modern high speed off road UTVs. The load capacity and ride height can be tuned according to the desired payload.




SLING LOADABLE AND TIE DOWN

The trailer is fitted with four lift and tie down rings for air transportability internal to an aircraft, sling loadable and parachute air droppable. Ring sizing was designed for compliance with MIL-STD-209K. The trailer's ultra narrow width of 152cm / 59.75" allows air transportability in aircraft such as the V-22 Osprey.

Phone: (613) 692-6368 **Email:** mark@edeyfx.com

Address: 3850 Prince of Wales Dr, Ottawa, ON



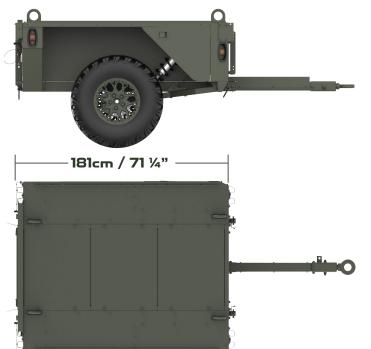



ADAPTABLE TO MATCH YOUR VEHICLE

Available in 152cm (60"), 188cm (74") or 216cm (85") widths, the LTT can match the track width of the tow vehicle while retaining 90% of part commonality. Trailers can be configured on a per order basis to incorporate common mechanical components from the tow vehicle (e.g. tires, brakes, wheel hubs).



ADDITIONAL FEATURES

The lower compartment fits 16 standard fuel cans for a lower center of mass. The tail gate features removable traction pads and a spare tire mount to support the towing vehicle in emergency situations. Jack points at each corner and the tongue to allow for field servicing and platform stability on uneven terrain. Removable side walls offer extra storage capacity to the upper deck.

SPECIFICATIONS

EXTERIOR DIMENSIONS $(L \times W \times H)$	300 x 152 x 122 cm (118" x 59.75" x 48.2")
TRAILER WEIGHT	385 kg (850 lb) base weight
PAYLOAD CAPACITY	453.5 kg (1000 lb)
DECK HEIGHT	110.5 cm (43.5") unloaded, 94 cm (37.0") at 453.5 kg (1000 lb) payload
GROUND CLEARANCE	49.5 cm (19.5") unloaded, 33 cm (13.0") at 453.5 kg (1000 lb) payload
UPPER CARGO DECK DIMENSIONS	180 x 142.2 cm (71" x 56")
INTERIOR CARGO VOLUME	178 x 67 x 51cm (70" x 26.5" x 20")
TIRE SIZE	32x10R15 run-flat tires
BRAKES	2 piston calipers and rotors, parking brake or optional surge brake
SUSPENSION	Independent trailing arms, coilover shocks
STANDARD FEATURES	Folding tailgate, auxiliary storage cabinets, tie-down rings for transport, L-track cargo tie-downs, 24V LED NATO lighting package
OPTIONAL EQUIPMENT	Removable side and end walls, spare tire mount, swivel lunette ring, litter mounts, lift rings for air transport and sling-loading

