

# **LIGHT TACTICAL TRAILER - 60**



### **MAXIMIZED STORAGE CAPACITY**

EDEY FX's Light Tactical Trailer (LTT) is an innovative support platform designed to maximize storage and operational flexibility for tactical teams. It features a spacious internal cargo bay for heavier equipment, an upper deck with removable panels, modular side walls. Dual side compartments and a folding tailgate provide enhanced accessibility.



## 12" OF SUSPENSION TRAVEL

The LTT features independent trailing arms paired with coilover shocks, providing exceptional off-road handling and durability. With 30.5 cm / 12" of wheel travel and 33 cm / 13" of ground clearance at GVW, it's built to keep pace with modern high-speed off-road vehicles. Load capacity and ride height are fully adjustable to accommodate mission-specific payloads and terrain conditions.




# **AIRCRAFT TRANSPORTABLE**

The trailer is equipped with four lift and tie-down rings, enabling internal air transport, sling load, and parachute airdrop operations. These rings are compliant with MIL-STD-209K to ensure compatibility with standard military equipment. The trailer's ultra narrow width of 152cm / 59.75" allows air transportability in aircraft such as the V-22 Osprey.

**Phone:** (613) 692-6368 **Website:** edeyfx.com **Address:** 3850 Prince of Wales Dr, Ottawa, ON

Email: mark@edeyfx.com



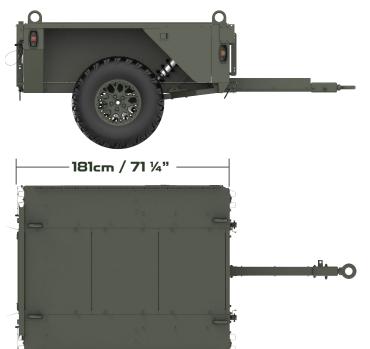



## ADAPTABLE TO MATCH YOUR VEHICLE

Available in 151.8 cm / 59.8", 192.1 cm / 75.6", and 236.2 cm / 93" widths, the LTT track width can be matched to the tow vehicle while maintaining 90% part commonality. Each trailer can be configured per order to incorporate common mechanical components from the tow vehicle, such as tires, brakes, and wheel hubs.



## **ADDITIONAL FEATURES**

The primary cargo compartment provides a lower center of mass and holds up to 32 fuel cans. Removable tailgate traction pads and spare tire mount provide emergency support. Jack points at each corner enable field servicing and platform stability. Removable side walls and superstructure increase storage capacity, and a canvas cover offers weather protection for cargo or passengers.

### **SPECIFICATIONS**

EXTERIOR DIMENSIONS (L x W x H)	300 x 152 x 122 cm / 118" x 59.75" x 48.2"
PAYLOAD CAPACITY	453.5 kg / 1000 lb
TRAILER WEIGHT	385 kg / 850 lb base weight
GROUND CLEARANCE	49.5 cm / 19.5" unloaded, 33 cm / 13.0" at 453.5 kg / 1000 lb payload
UPPER DECK HEIGHT	110.5 cm / 43.5" unloaded, 94 cm / 37.0" at 453.5 kg /1000 lb payload
UPPER DECK DIMENSIONS $(L \times W)$	180 x 142.2 cm / 71" x 56"
LOWER CARGO VOLUME (L $\times$ W $\times$ H)	178 x 67 x 51cm / 70" x 26.5" x 20"
TIRE SIZE	32x10R15 run-flat tires
BRAKES	2 piston calipers and rotors, parking brake or optional surge brake
SUSPENSION	Independent trailing arms, coilover shocks
STANDARD FEATURES	Folding tailgate, auxiliary storage cabinets, tie-down rings for transport, L-track cargo tie-downs, 24V LED NATO lighting package
OPTIONAL EQUIPMENT	Removable side and end walls, spare tire mount, swivel lunette ring, litter mounts, lift rings for air transport and sling-loading

