

LIGHT TACTICAL TRAILER - 93



MAXIMIZED STORAGE CAPACITY

EDEY FX's Light Tactical Trailer (LTT) is an innovative support platform designed to maximize storage and operational flexibility for tactical teams. It features a spacious internal cargo bay for heavier equipment, an upper deck with removable panels, modular side walls, and a rugged superstructure. Dual side compartments and a folding tailgate provide enhanced accessibility.



10" OF SUSPENSION TRAVEL

The LTT features independent trailing arms paired with FOX coilover shocks, providing exceptional off-road handling and durability. With 25.4 cm / 10" of wheel travel and 57.2 cm / 22.5" of ground clearance at GVW, it's built to keep pace with modern high-speed off-road vehicles. Load capacity and ride height are fully adjustable to accommodate mission-specific payloads and terrain conditions.




AIRCRAFT TRANSPORTABLE

The trailer is equipped with four lift and tie-down rings, enabling internal air transport, sling load, and parachute airdrop operations. These rings are compliant with MIL-STD-209K to ensure compatibility with standard military equipment. Load-securing track installed at key points on both lower and upper decks offer flexible and secure cargo configurations during transport.

Phone: (613) 692-6368 **Website:** edeyfx.com **Address:** 3850 Prince of Wales Dr, Ottawa, ON

Email: mark@edeyfx.com



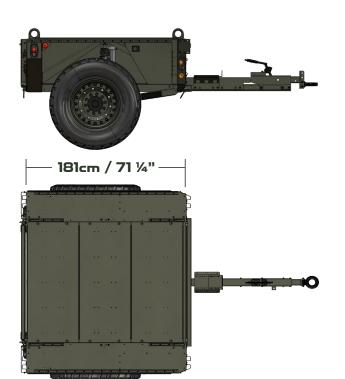



ADAPTABLE TO MATCH YOUR VEHICLE

Available in 151.8 cm / 59.75", 192.1 cm / 75.6", and 236.2 cm / 93" widths, the LTT track width can be matched to the tow vehicle while maintaining 90% part commonality. Each trailer can be configured per order to incorporate common mechanical components from the tow vehicle, such as tires, brakes, and wheel hubs.



ADDITIONAL FEATURES

The primary cargo compartment provides a lower center of mass and holds up to 32 fuel cans. Removable tailgate traction pads and spare tire mount provide emergency support. Jack points at each corner enable field servicing and platform stability. Removable side walls and superstructure increase storage capacity, and a canvas cover offers weather protection for cargo or passengers.

SPECIFICATIONS

EXTERIOR DIMENSIONS (L x W x H)	336.6 x 236.2 x 233.5 cm / 132" x 93" x 91.9" (with superstructure)
PAYLOAD CAPACITY	1360.8 kg / 3000 lb
TRAILER WEIGHT	878.2 kg / 1936 lb with deck inserts, side walls and superstructure
GROUND CLEARANCE	71.1 cm / 28" unloaded, 57.15 cm / 22.5" at GVW
UPPER DECK HEIGHT	132.1 cm / 52" unloaded, 118.1 cm / 46.5" at GVW
UPPER DECK DIMENSIONS $(L \times W)$	180.8 x 219.2 cm / 71.25" x 86.3"
LOWER CARGO VOLUME $(L \times W \times H)$	180.8 x 136.5 x 47.2cm / 71.2" x 53.7" x 18.6"
TIRE SIZE	335 / 80 R20 Michelin run flats.
BRAKES	Hydraulic surge, 2 piston calipers and rotors, manual parking brake
SUSPENSION	Independent trailing arms, FOX coil-over shocks
STANDARD FEATURES	Folding tailgate, auxiliary storage cabinets, front spare tire mount, L-track cargo tie-downs, 24V LED NATO lighting package
OPTIONAL EQUIPMENT	Side and end walls, superstructure, canvas top, swivel lunette ring, litter mounts, aircraft lift & tie down rings, European lighting package

